Luminaire
Code 0457020A
Name LOGICO TAVOLO SETA LUCIDO
Measurem.
Code FTS0002514
Name LOGICO TAVOLO SETA LUCIDO

Luminaire Flux	1591.93 lm	Luminaire Power	126.00 W	Efficacy	12.63 lm/W	Efficiency	84.23%
Lamps Flux	1890.00 lm	Maximum value	116.53 cd/klm	Position	C=240.00 G=35.00	CG	Asymmetrical

Round Luminaire	Diam. 400 mm	Height	340 mm
Round Luminous Area	Diam. 400 mm	Height	340 mm
Horizontal Luminous Area	0.125664 m2	Emitting area on Plane 180°	0.136000 m2
Emitting area on Plane 0°	0.136000 m2	Emitting area on Plane 270°	0.136000 m2
Emitting area on Plane 90°	0.136000 m2	Glare area at 76°	0.162361 m2
Coordinate system	CG	Symmetry Type	Asymmetrical
Date	08-09-2002	Maximum Gamma Angle	180
Measurement Distance	0.00	Measurement Flux	1890.00 lm

64543 A ES FR

C.I.E.	27 54 77 56 84	D DIN 5040	C11
F UTE	0.47 J + 0.37 T	B NBN	BZ 7

Diam=400mm

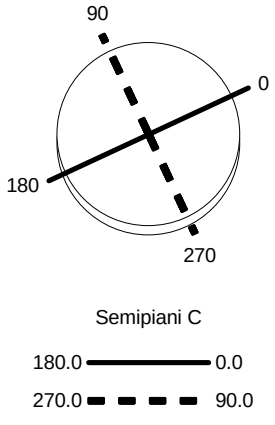

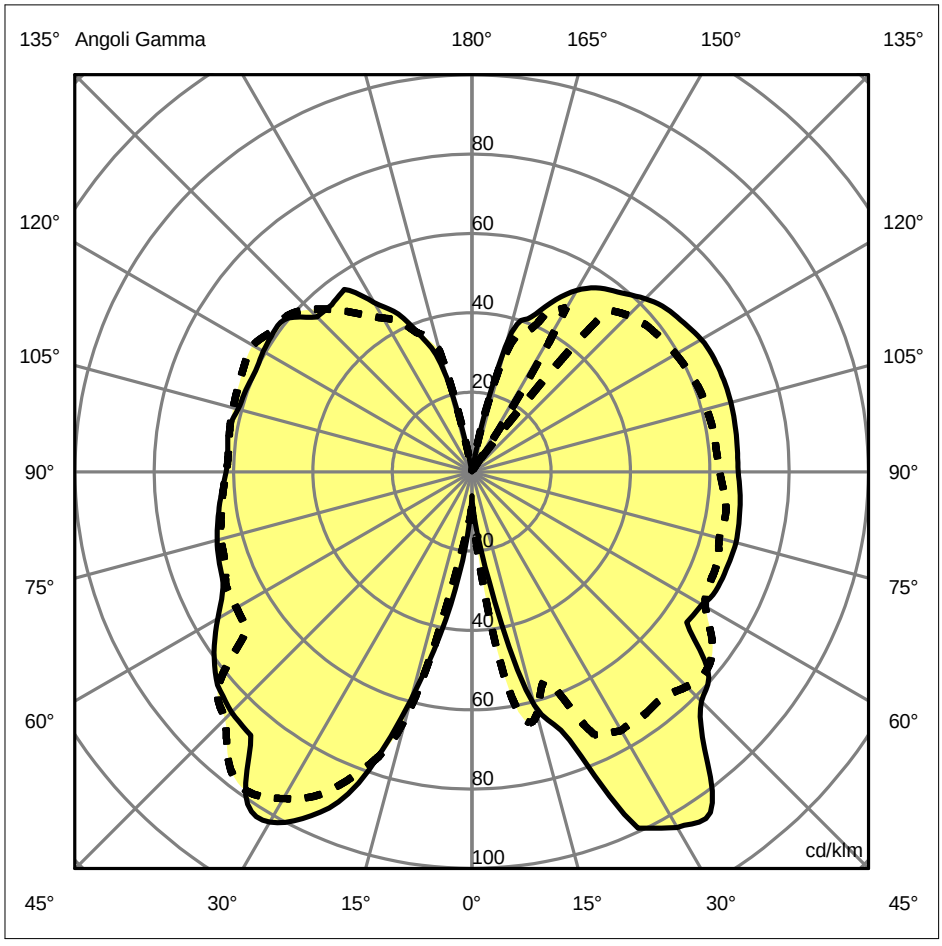

ULOR	37.16 %
DLOR	47.07 %
RN	44.12 %

Luminaire
Code 0457020A
Name LOGICO TAVOLO SETA LUCIDO
Measurem.
Code FTS0002514
Name LOGICO TAVOLO SETA LUCIDO

Luminaire Flux	1591.93 lm	Luminaire Power	126.00 W	Efficacy	12.63 lm/W	Efficiency	84.23%
Lamps Flux	1890.00 lm	Maximum value	116.53 cd/klm	Position	C=240.00 G=35.00	CG	Asymmetrical

Round Luminaire	Diam. 400 mm	Height	340 mm
Round Luminous Area	Diam. 400 mm	Height	340 mm
Horizontal Luminous Area	0.125664 m2	Emitting area on Plane 180°	0.136000 m2
Emitting area on Plane 0°	0.136000 m2	Emitting area on Plane 270°	0.136000 m2
Emitting area on Plane 90°	0.136000 m2	Glare area at 76°	0.162361 m2
Coordinate system	CG	Symmetry Type	Asymmetrical
Date	08-09-2002	Maximum Gamma Angle	180
Measurement Distance	0.00	Measurement Flux	1890.00 lm

64543 A ES FR

C.I.E.	27 54 77 56 84	D DIN 5040	C11
F UTE	0.47 J + 0.37 T	B NBN	BZ 7

Apertura a destra non trovata, gamma =34

Apertura a destra non trovata, gamma =34

Apertura a destra non trovata, gamma =34

Luminaire
Code 0457020A
Name LOGICO TAVOLO SETA LUCIDO
Measurem.
Code FTS0002514
Name LOGICO TAVOLO SETA LUCIDO

Luminaire Flux	1591.93 lm	Luminaire Power	126.00 W	Efficacy	12.63 lm/W	Efficiency	84.23%
Lamps Flux	1890.00 lm	Maximum value	116.53 cd/klm	Position	C=240.00 G=35.00	CG	Asymmetrical

UGR
S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions	ViewedCrosswise					ViewedEndwise				
x=2H y=2H	8.7	9.7	9.6	10.6	11.4	8.5	9.5	9.3	10.4	11.4
x=2H y=3H	11.0	11.9	11.9	12.8	13.6	10.7	11.6	11.5	12.4	13.6
x=2H y=4H	12.2	13.1	13.1	14.0	14.7	11.9	12.7	12.7	13.6	14.7
x=2H y=6H	13.4	14.2	14.3	15.1	15.9	13.1	13.9	14.0	14.8	15.9
x=2H y=8H	14.0	14.8	14.9	15.7	16.5	13.7	14.4	14.6	15.3	16.5
x=2H y=12H	14.6	15.3	15.5	16.2	17.1	14.3	15.0	15.2	15.9	17.1
x=4H y=2H	9.5	10.4	10.4	11.3	12.2	9.4	10.2	10.3	11.1	12.2
x=4H y=3H	12.1	12.8	13.0	13.7	14.6	11.8	12.6	12.7	13.5	14.6
x=4H y=4H	13.4	14.1	14.3	15.0	15.9	13.2	13.8	14.1	14.7	15.9
x=4H y=6H	14.8	15.4	15.8	16.4	17.3	14.5	15.1	15.4	16.0	17.3
x=4H y=8H	15.5	16.1	16.5	17.0	17.9	15.2	15.7	16.1	16.7	17.9
x=4H y=12H	16.2	16.7	17.1	17.6	18.5	15.8	16.3	16.8	17.3	18.5
x=8H y=4H	14.0	14.5	14.9	15.5	16.5	13.8	14.4	14.8	15.3	16.5
x=8H y=6H	15.6	16.1	16.6	17.1	18.1	15.4	15.9	16.4	16.8	18.1
x=8H y=8H	16.5	16.9	17.5	17.9	18.9	16.2	16.6	17.2	17.6	18.9
x=8H y=12H	17.3	17.7	18.3	18.7	19.7	17.0	17.4	18.0	18.4	19.7
x=12H y=4H	14.1	14.6	15.1	15.6	16.6	13.9	14.4	14.9	15.4	16.6
x=12H y=6H	15.8	16.2	16.8	17.2	18.3	15.6	16.1	16.6	17.0	18.3
x=12H y=8H	16.8	17.1	17.7	18.1	19.2	16.6	16.9	17.5	17.9	19.2